



# RIDGID R84015 X2 Case Removal

Written By: Evan Long



## INTRODUCTION

First step to repairing RIDGID drill. All it takes is getting the case off...

---

### TOOLS:

- [Phillips #2 Screwdriver](#) (1)
  - [T20 Torx Screwdriver](#) (1)
-



## Step 1 — RIDGID R84015 X2 Case Removal




- Using a Torx T20 screwdriver, remove the four screws attaching the back plate.

## Step 2



- Remove the five screws attaching the drill handle.

### Step 3

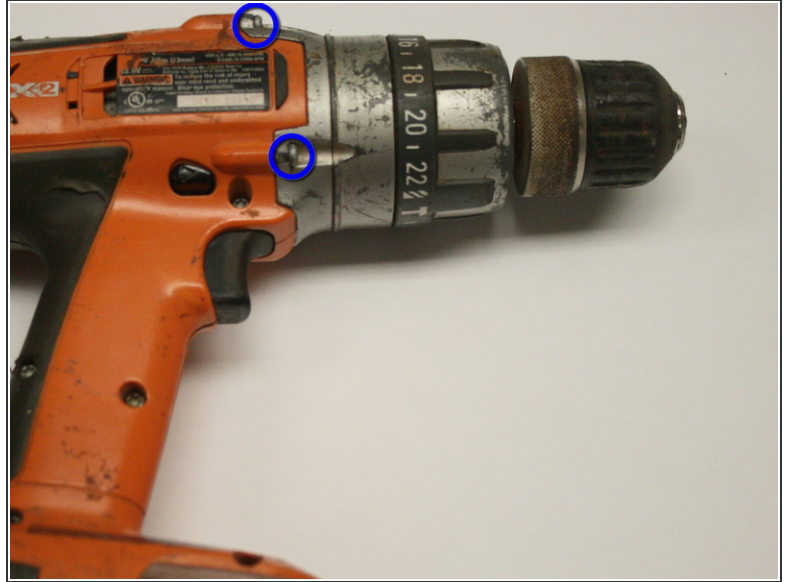

- Remove the 4 screws attaching the front of the casing.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-01 11:11:07 PM.